

2030F WEBBING LANYARDS

Affordable lanyards in polyester tubular webbing (width 27 mm).

No shock absorber.

Certified for positioning use or as anchors only.


Strength 22 kN.

CE EN 354 - EN 795/B

GENERAL

MODEL	LENGTH	WEIGHT
2030050F	50 cm	55 g
2030100F	100 cm	90 g
2030150F	150 cm	120 g
2030200F	200 cm	155 g

TECHNICAL SHEET

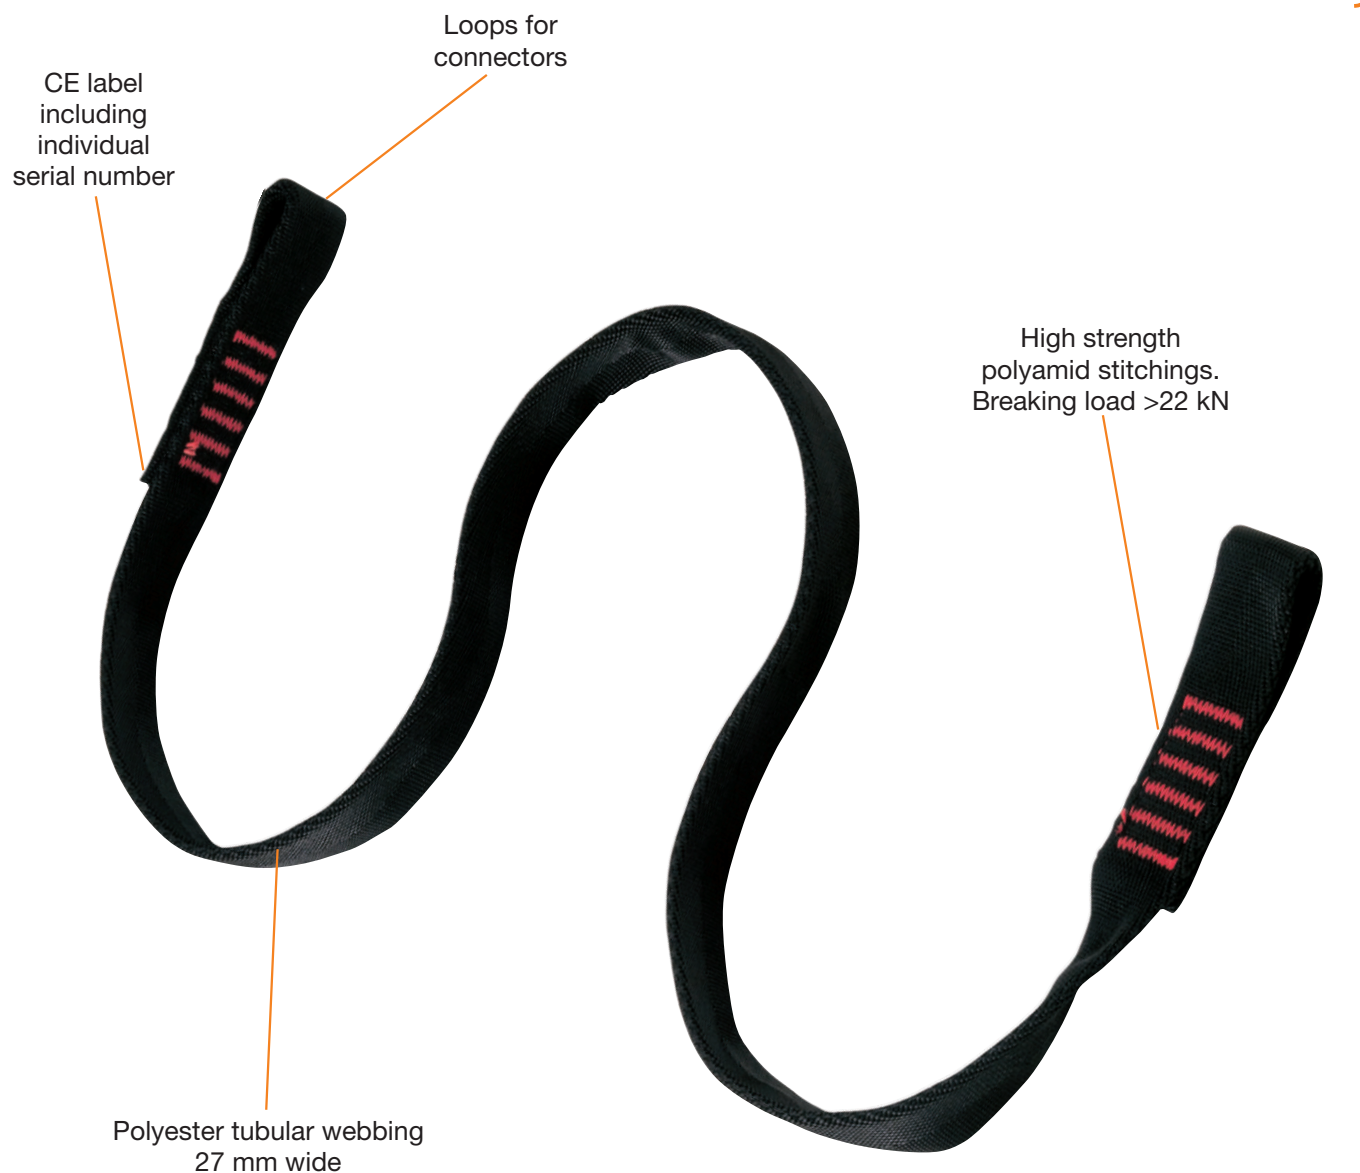

EN795/B USE

