

2075 **COBRA 6**

Retractable fall arrester EN 360, webbing length 6m.

Webbing extends and retracts automatically following the movements of the user.

Maximum force in the event of fall <6 kN limited by energy absorber. Breaking load 15 kN.

Easier use compared to cable models thanks to smaller dimension and lower weight.

Certified for vertical use (standard EN 360 certification).

CE EN 360

CONSTRUCTION PYLONS/INDUSTRY



Individual identification label:  
- batch number  
- serial number

Strong attachment point

Supplied with guiding cord Ø5 x 6m, useful to guide the webbing back into the retractor.



ABS Shells for best strength




CE label

Polyester energy absorber  
Maximum peak force < 6 kN

Polyamide webbing  
Width: 20 mm  
Strength >12 kN  
Length 6 m

Vertical use

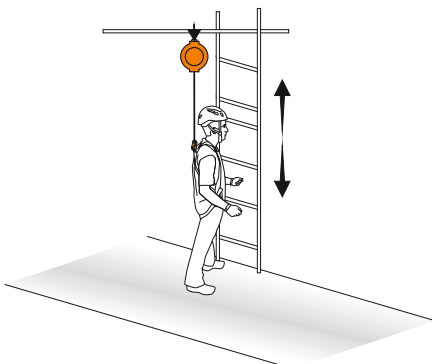

Fall indicator integrated on the connector

Double action safety connector with swivel ref.0925  
Strength >23 kN  
Opening 20 mm  
Zinc Plated