


2131 DYNATWO

Double-leg work positioning lanyard.
 Leg 1: 30 cm, Leg 2: 60 cm.
 Made from robust Ø11 mm dynamic rope.
 Connection of the two sections by an aluminium alloy ring gives maximum strength (22 kN) in all directions.
 Dynamic rope allows absorption of little shocks (it is not a certified energy absorber).

CE EN 354

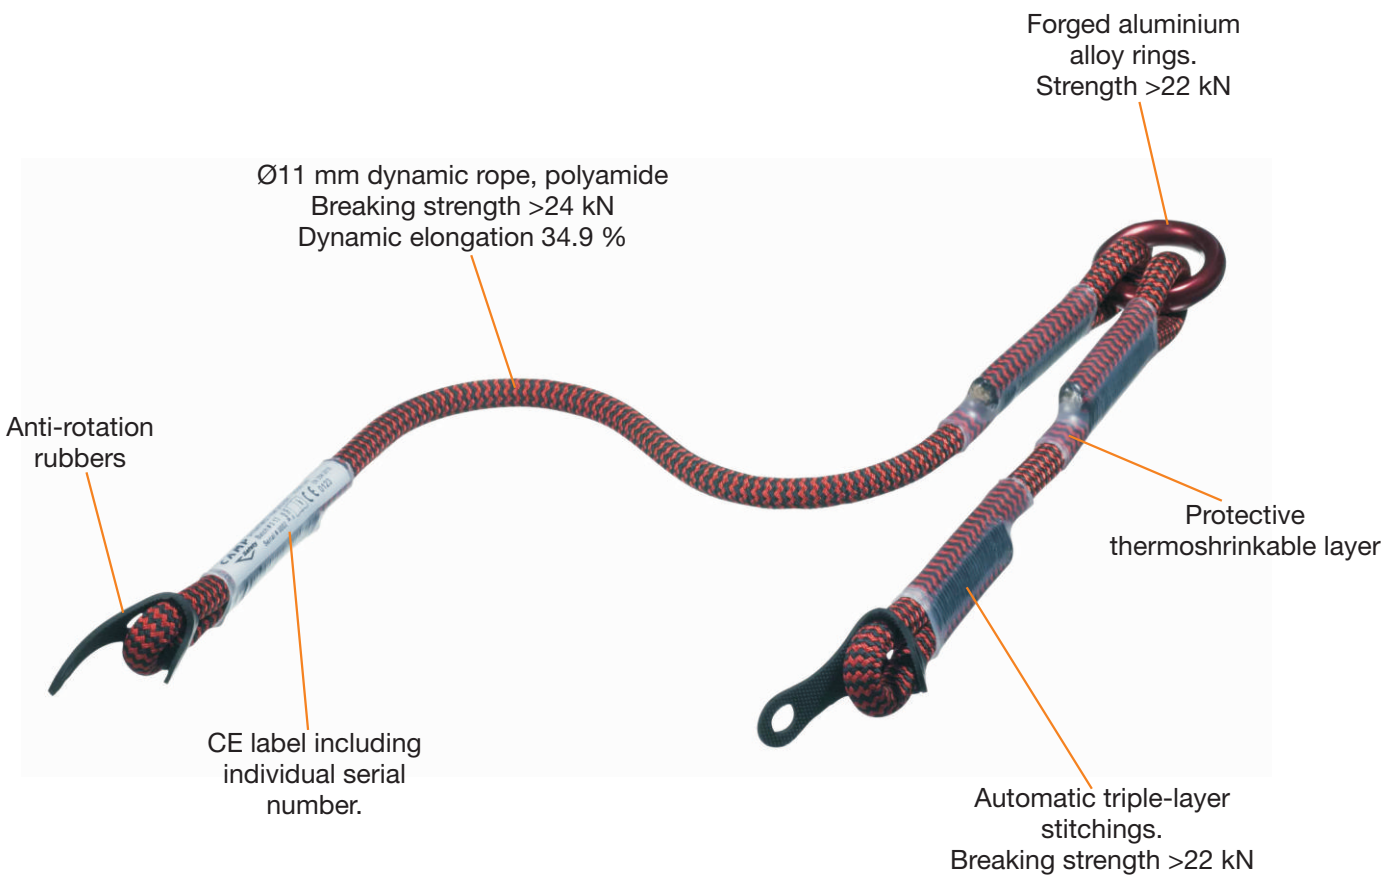

DYNAMIC PERFORMANCE		
Length of lanyard: 100 cm Test mass: 100 kg		
Model	Peak force Free fall 0.6 m (Work positioning limit)	Peak force Free fall 1 m (Fall factor 1)
Static lanyard D=10.5 mm	7.2 kN	14.5 kN
Dynatwo	5.2 kN	8.5 kN

The only scope of this chart is to compare dynamic performance of the two models.
 Do not use any EN 354 lanyard for fall-arrest purposes without connecting it to a EN 354 energy absorber.



- Connectors supplied separately -