


Ref.7250207 RETEXO GYRO REWIND


Retexo Gyro Rewind lanyards feature our proprietary Gyro swivel and rewind lanyards designed for the most technical users. The proprietary Gyro swivel rotates at all three connection points to prevent twisting. Robust elastic webbing lanyards have a high elongation ratio (1:2.3). Certified for horizontal use over sharp edges ($r > 0.5$ mm). The Retexo is a next generation energy absorber designed to be particularly light and compact. Energy absorption is optimized to limit extension in the event of a fall as much as possible while still achieving a low fall arrest force. With lanyards with a total length up to 200 cm, the Retexo is certified for workers with a maximum total weight up to 130 kg. Ideal in situations with limited clearance (< 4 m) when used with lanyards with a total length up to 150 cm. Robust case with zip closure for easy inspection of the fall indicator and the identification label. Case is removable and washable.

TOWERS/INDUSTRY ROPE ACCESS TEAM RESCUE CONSTRUCTION
CONFINED

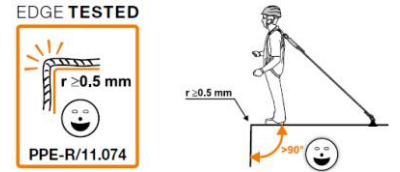

Certified for horizontal use over an edge

GYRO + 1176 + 2x0984 100-140 cm

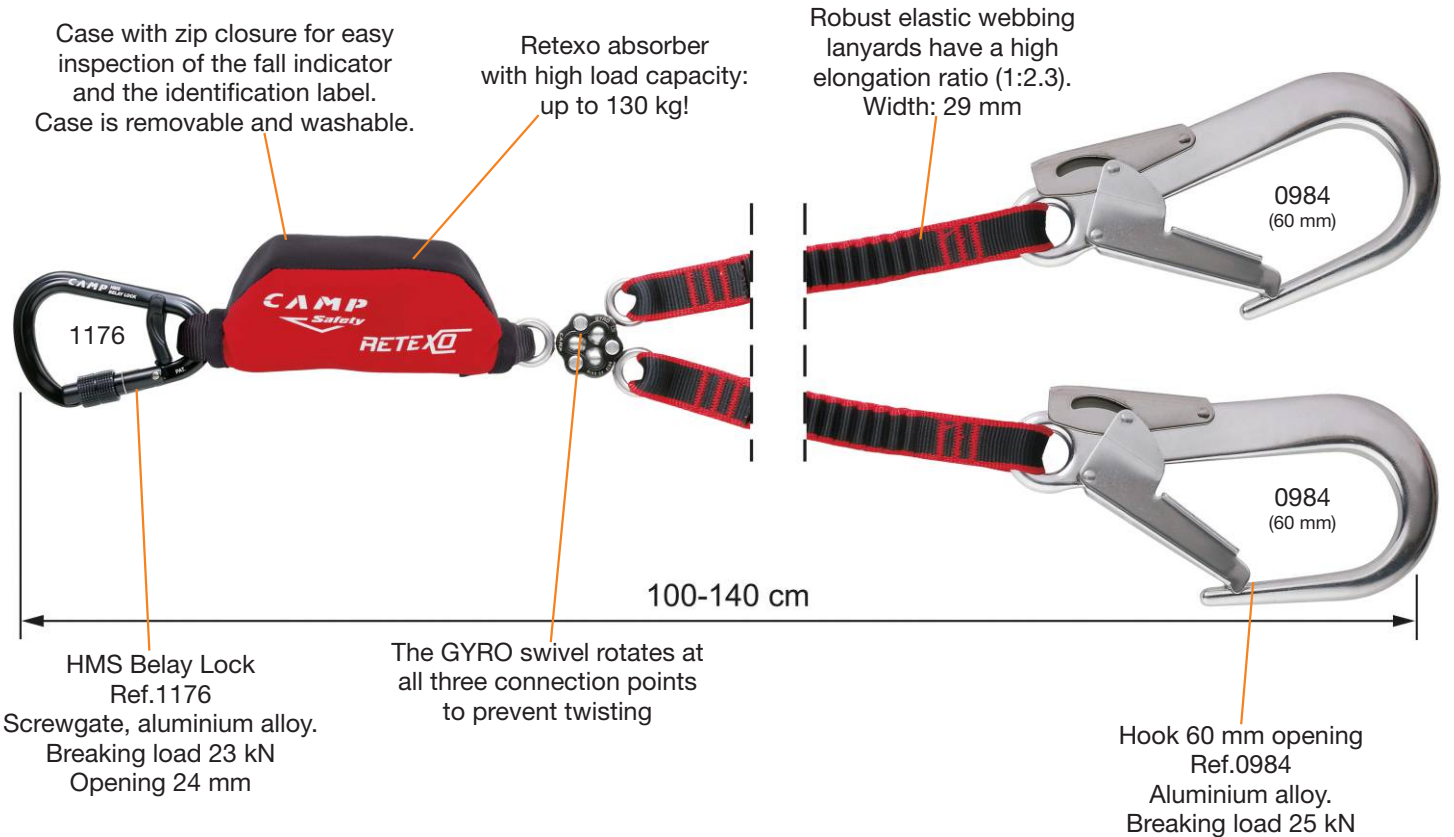


Ref.	Product name Nombre del producto	Weight Peso		Strength Resistencia	Working load Max Carga de trabajo Max	CE	 PPE-R/11.074
		g	oz	kN	kg		
7250207	RETEXO GYRO REWIND + 1176 + 2x0984 100-140 cm	1590	56.1	22	130	•	•

RETEXO GYRO



The GYRO swivel rotates at all three connection points to prevent twisting

CE Label

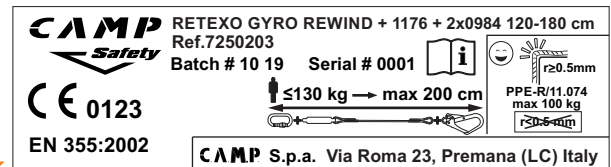


Case with zip closure for easy inspection of the fall indicator and the identification label. Case is removable and washable.



One label with all the information.

Fall Indicator Label

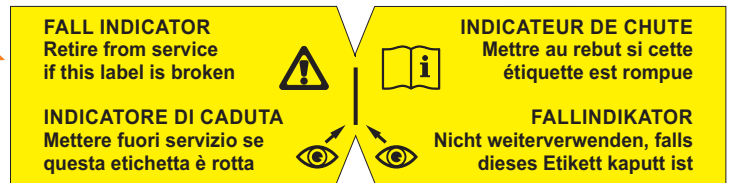

Retire from service if this label is broken

RETEXO ABSORBER - Clearance distance

A

Ha
Clearance distance below the anchor point (m)
Tirante d'aria sotto l'ancoraggio (m)

A Total length of the lanyard (m)	Standard Users ≤ 100 kg				Heavy Users ≤ 130 kg			
	Fall factor / Fattore di caduta Facteur de chute				Fall factor / Fattore di caduta Facteur de chute			
	0	1	2	0	1	2		
1,20	3,70	4,10	4,50	1,20	3,70	4,25	4,80	
1,40	3,90	4,35	4,80	1,40	3,90	4,50	5,20	
1,50	4,00	4,50	5,00	1,50	4,00	4,65	5,40	
1,60	4,10	4,65	5,20	1,60	4,10	4,80	5,60	
1,80	4,30	4,90	5,45	1,80	4,30	5,10	5,90	
2,00	4,50	5,15	5,70	2,00	4,50	5,40	6,20	

B

Hf
Clearance distance below the user's feet (m)
Tirante d'aria sotto i piedi dell'operatore (m)

Standard Users ≤ 100 kg		Heavy Users ≤ 130 kg	
Hf	Fall factor / Fattore di caduta Facteur de chute	Hf	Fall factor / Fattore di caduta Facteur de chute
A	2	A	2
Total length of the lanyard (m)	2,00	Total length of the lanyard (m)	6,20
	6,20		6,70

C

B
Extension of the energy absorber (m)
Estensione dell'assorbitore di energia (m)

Standard Users ≤ 100 kg				Heavy Users ≤ 130 kg			
A Total length of the lanyard (m)	B	Fall factor / Fattore di caduta Facteur de chute		A Total length of the lanyard (m)	B	Fall factor / Fattore di caduta Facteur de chute	
		0	2			0	2
		1,20	0			0,40	0,80
1,40		0,45	0,90	1,40		0,60	1,30
1,50		0,50	1,00	1,50		0,65	1,40
1,60		0,55	1,10	1,60		0,70	1,50
1,80		0,60	1,15	1,80		0,80	1,60
2,00		0,65	1,20	2,00		0,90	1,70