



Fall arrest lanyards constructed from 10.5 mm polyamide static rope. Kernmantle rope with an internal core and woven sheath offers optimal durability. Equipped with energy absorber (ref.2029). Protective system for rope loops and stitching is incredibly compact and robust. Certified for horizontal use over sharp edges ($r \geq 0.5$ mm).

EDGE TESTED





Certified for horizontal use over an edge

SINGLE 185 cm

Shock Absorber Ref.2029
 Maximum extension:
 Fall factor 1 = 90 cm
 Fall factor 2 = 160 cm
 Maximum peak force:
 <6 kN (3.5-4.5 kN approx.)

10.5 mm Semi-static rope
 Breaking load 27.5 kN

High strength polyamid stitching
 Breaking load 22 kN
 Equipped with loop protection system

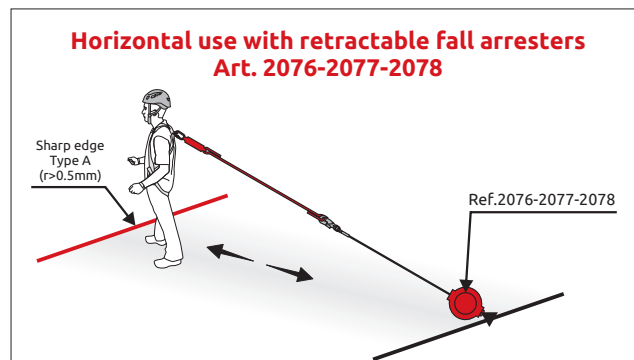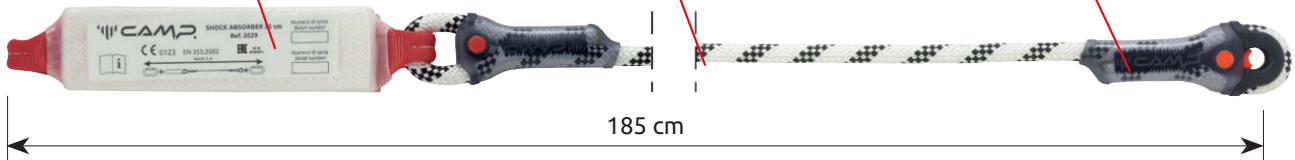

Ref.	Product name	Weight		Strength	Working load Max	CE	 PPE-R/11.074
		g	oz	kN	kg		
5030101	SHOCK ABSORBER ROPE SINGLE 185 cm	395	13.9	15	100	•	•