

Incredibly versatile adjustable lanyard thanks to the many certifications:

- EN 358 work positioning lanyard,
- EN 795/B anchoring device,
- EN 795/C temporary lifeline,
- EN 353-2 fall arrester,
- EN 341/2A emergency evacuation device,
- EN 12841/C rope access descender.


Constructed from robust 11 mm semi-static rope with an innovative mechanical adjuster that allows for precise and quick adjustment even while under tension.

The locking cam system uses an innovative graduated design for smooth action on the rope and the absorption of energy from small shocks and dynamic loads with a slight amount of rope slippage.

Adjustment is simple and intuitive. To reduce length, simply pull the rope through the device. To increase length, use the trigger for limited tension situations or the lever when the rope is completely loaded.

Rope is removable and replaceable.

Equipped with NFC TRACK tag for digital identification.

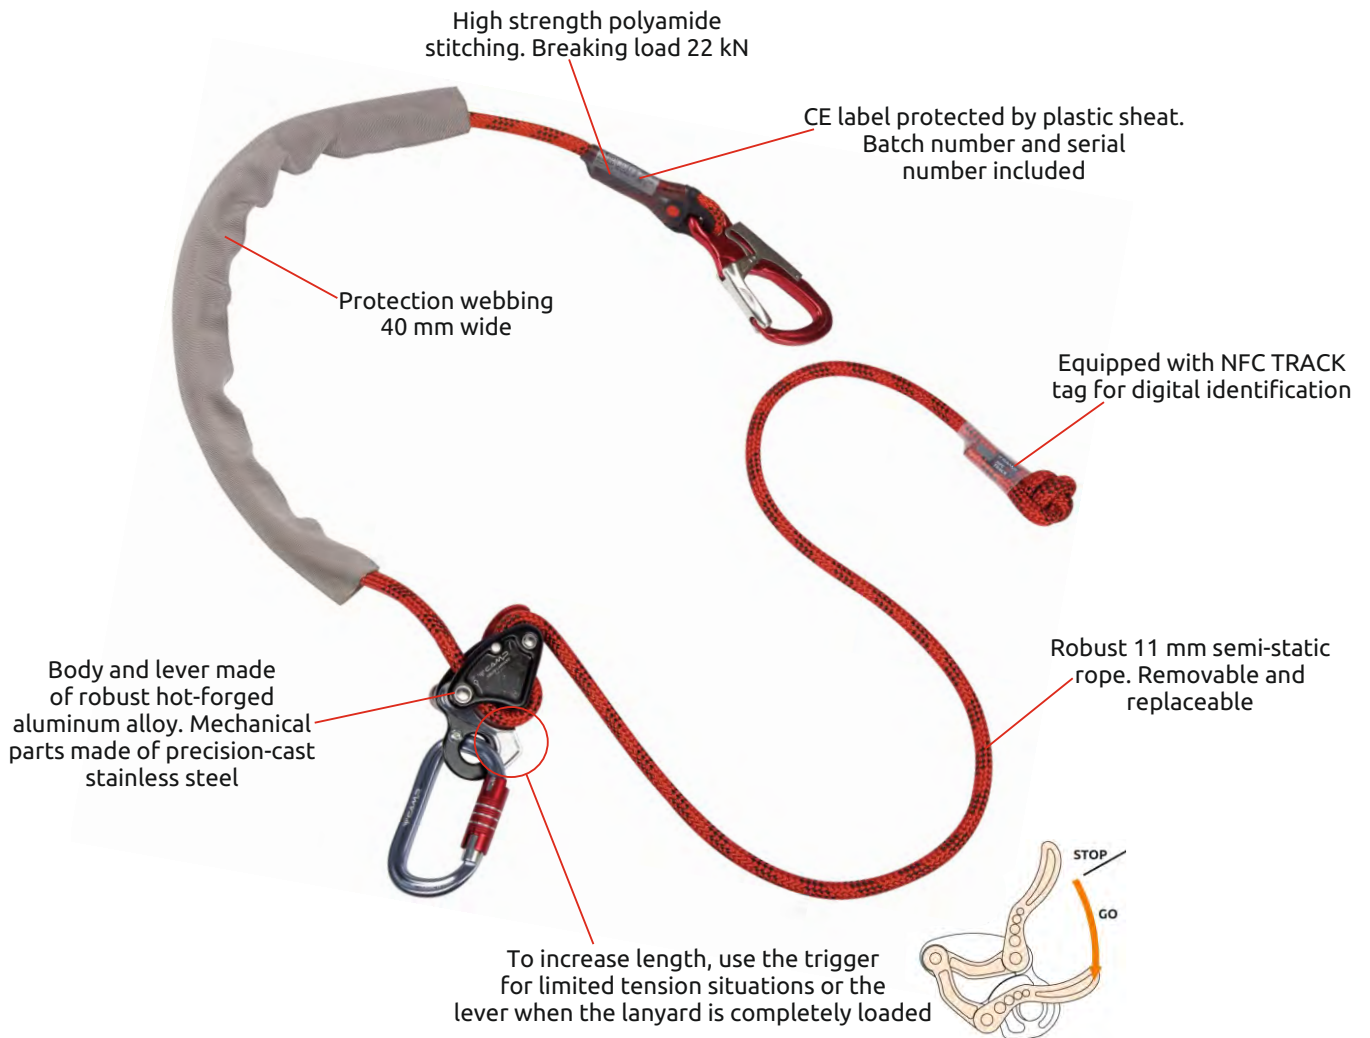

Ref.	Product name Nombre del producto	Weight Peso		CE				STANDARD		EAC
		g	oz	EN 358	EN 353-2	EN 12841/C	EN 795/B	EN 795/C	EN 341/2A	
351701	DRUID LANYARD + 2125 + 0995 0.5-2 m	720	25.4	•	•	•	•	•	•	•
351712	DRUID LANYARD + 2125 + 0984 0.5-2 m	1075	37.9	•	•	•	•	•	•	•
351710	DRUID LANYARD + 2125 + 2148 0.5-2 m	1230	43.4	•	•	•	•	•	•	•
351713	DRUID LANYARD + 2125 + 0984 0.5-3 m	1155	40.8	•	•	•	•	•	•	•
351702	DRUID LANYARD 0.5-2 m	525	18.5	•	•	•	•	•	•	•
351703	DRUID LANYARD 0.5-3 m	600	21.2	•	•	•	•	•	•	•
351704	DRUID LANYARD 0.5-5 m	820	28.9	•	•	•	•	•	•	•
351705	DRUID LANYARD 0.5-10 m	1235	43.6	•	•	•	•	•	•	•
351706	DRUID LANYARD 0.5-20 m	2010	71.0	•	•	•	•	•	•	•


DRUID LANYARD

WORK POSITION LANYARD

NFC - HF RFID | PAT. PEND

Ref. 3517

TOWERS/INDUSTRY, ROPE ACCESS, CONSTRUCTION, ROOFS, TREE CLIMBING, TEAM RESCUE

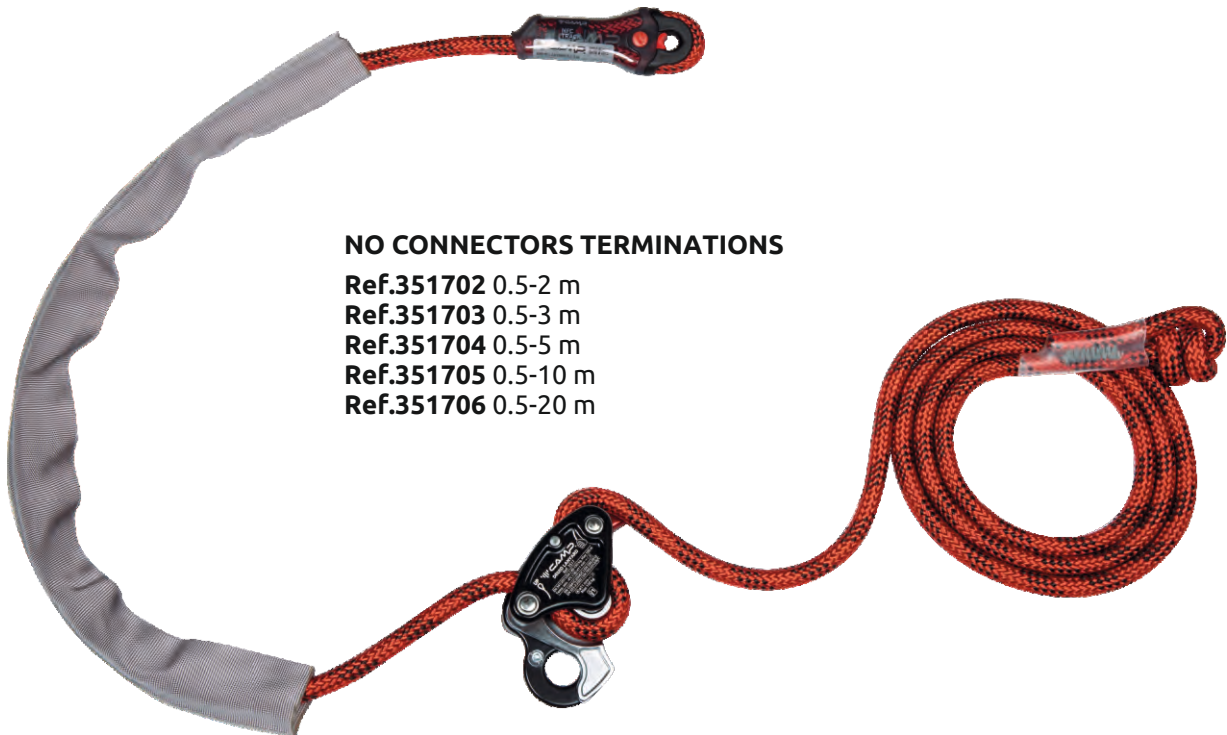

NO CONNECTORS TERMINATIONS

- Ref.351702 0.5-2 m
- Ref.351703 0.5-3 m
- Ref.351704 0.5-5 m
- Ref.351705 0.5-10 m
- Ref.351706 0.5-20 m



HERCULES Ref.0995
 Aluminium connector
 Double safety lever system
 Breaking load 30 kN
 Opening 23 mm

Ref.351701 + 2125 + 0995 0.5-2 m

Oval XL 3Lock ref.2125
 aluminum alloy
 connector


DRUID LANYARD

WORK POSITION LANYARD

NFC - HF RFID | PAT. PEND

Ref. 3517

TOWERS/INDUSTRY, ROPE ACCESS, CONSTRUCTION, ROOFS, TREE CLIMBING, TEAM RESCUE

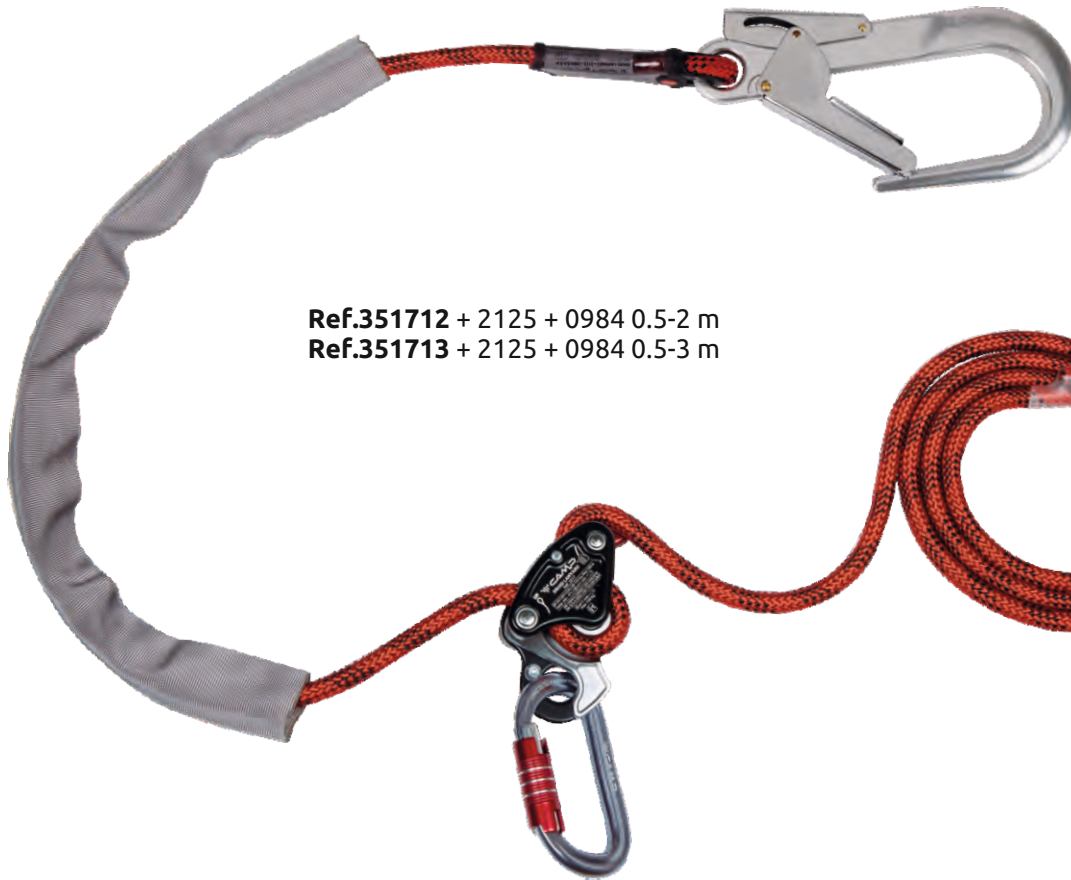


Hook 60 mm opening
Ref.0984
 Aluminium alloy.
 Breaking load 25 kN

Ref.351712 + 2125 + 0984 0.5-2 m
Ref.351713 + 2125 + 0984 0.5-3 m



High strength aluminium alloy connector
Ref.2148
 Breaking load 23 kN.
 Large opening for connecting to beams and tubes up to 62 mm.
 ANSI tested gate for increased strength in case of cross loading.

Ref.351710 + 2125 + 2148 0.5-2 m

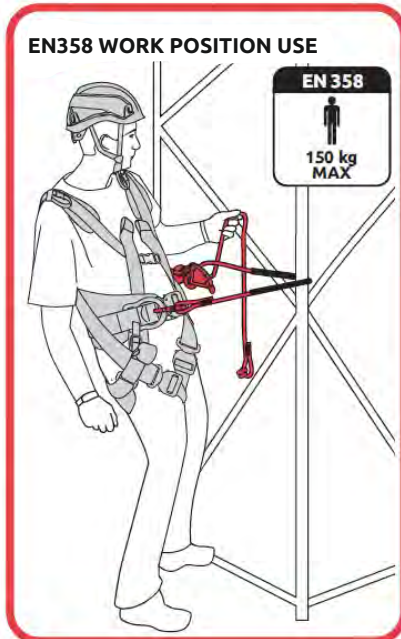




EN353-2 FALL ARREST USE

B	STANDARD	CONFIGURAZIONE CERTIFICATA	PESO MASSIMO	DISTANZA
	EN 353-2	Connettore EN 362 (L= 109 +/- 5 mm)	150 kg	A = 2,50 m B = 1,50 m C = 1,00 m

EN353-2 EMERGENCY EVACUATION DEVICE

C	STANDARD	MASSA DI DISCESA	40-150 kg
EN 341 Type 2 Class A	ALTEZZA DI DISCESA	100 m MAX	
	ENERGIA DI DISCESA	7,5x10 ⁹ J MAX	
	TEMPERATURA DI UTILIZZO	-4/+40 °C	
	VELOCITA' DI DISCESA	2 m/s MAX	

EN12841/C ROPE ACCESS DESCENDER

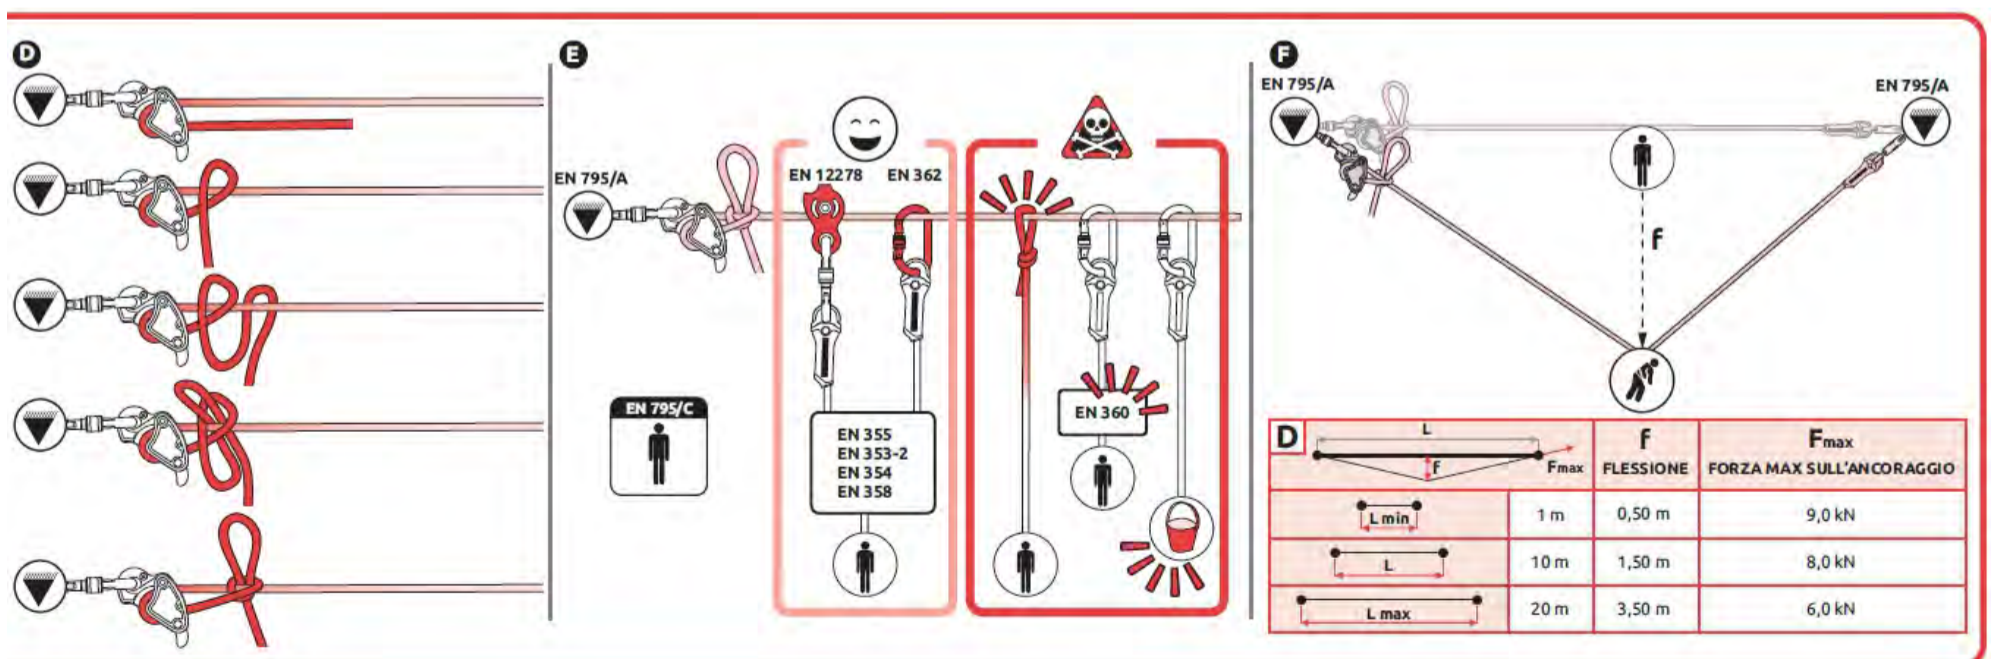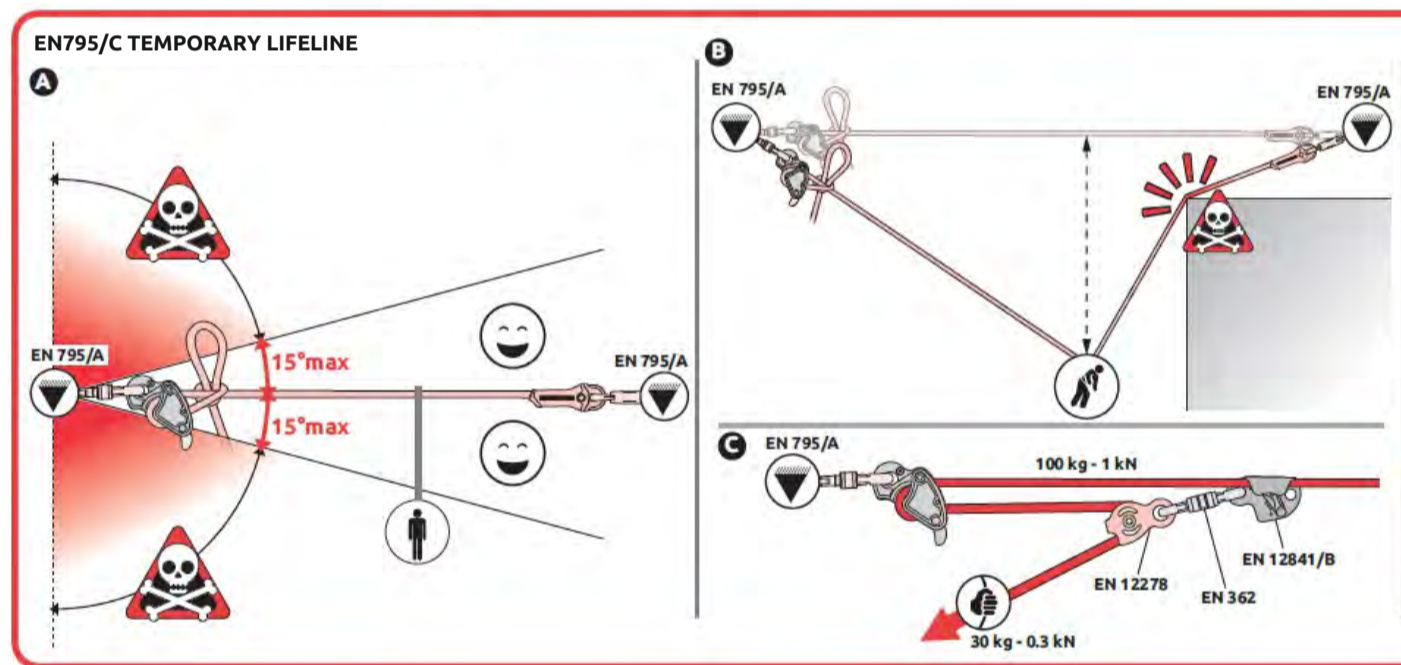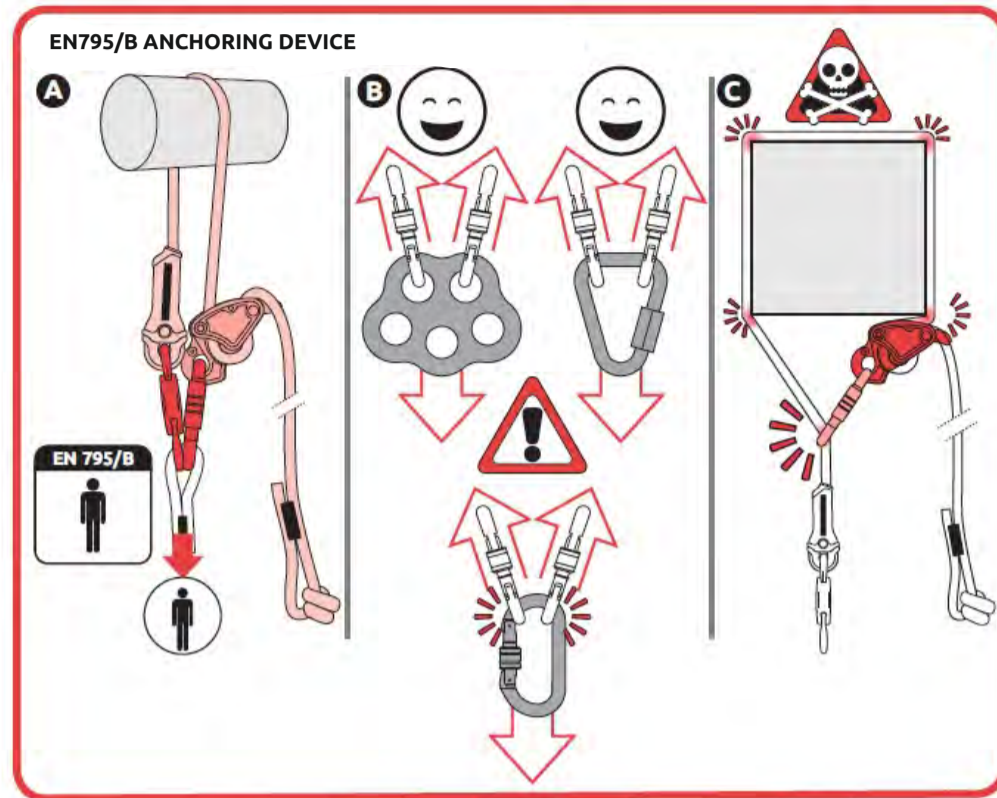

C.A.M.P. presents a **complete solution for the digital management of PPE**, both for allocation to users and for periodic inspections: the **NFC TRACK hardware tags on the products** work seamlessly with the **G.T.S. - Gear Tracking System software** to make the system very intuitive and easy to use.

NFC TRACK chips are installed on many C.A.M.P. products (harnesses, helmets, Retexo lanyards). They **can also be attached directly on any PPE** by the user, so that the user can assign the PPE data to the chip by means of the C.A.M.P. G.T.S.



NFC (Near Field Communication) technology is now present on most smartphones and used every day for smart payments. Today, it also represents the future for the individual identification of products.

The **HF RFID** (High Frequency Radio Frequency Identification) communication system on which NFC is based allows the C.A.M.P. NFC TRACK to be easily read using any latest generation smartphone or for professionals using a PC reader.

- G.T.S. - GEAR TRACKING SYSTEM

G.T.S. allows professionals to easily manage PPE both via the smartphone app (available on Play Store and Apple Store) and from a PC via the web app (campgts.it).

Two different packages allow for carrying out periodic inspections and also for managing the company allocation of PPE to its employees.

The database of **G.T.S.** includes the **technical information of all C.A.M.P. products** for work at height.

NFC TRACK chip installed!



campgts.it



DRUID LANYARD SPARE ROPE

- | | |
|---------------------|---------------|
| 35170101 + 0995 2 m | 35170401 5 m |
| 35170201 2 m | 35170501 10 m |
| 35170301 3 m | 35170601 20 m |

Replacement ropes for the Druid Lanyard.

