

## ENGLISH

### GENERAL INFORMATION

The C.A.M.P. Group meets the needs of workers at height with light and innovative products. These are designed, tested and manufactured to a certified quality system, ensuring reliable and safe products. These instructions inform you about the correct use throughout the life of the product: **read, understand and keep these instructions.** If lost, you can download the instructions from the web site [www.camp.it](http://www.camp.it). The declaration of conformity can be also downloaded from our site. The retailer must provide the instruction manual in the language of the country where the product is to be sold.

#### USE

This equipment should be used only by trained and competent persons. Otherwise the user should be under the direct supervision of a trained and competent person. You must have received qualified instruction before using this product. The consequences of incorrect selection, misuse or poor maintenance of equipment could result in damage, serious injury or death. The user must be medically fit and capable to control his own security and any possible emergency situations. The product should only be used as instructed and no alterations should be made to it. It may be used in conjunction with any appropriate items of suitable specification and according to the standards, with due consideration to the limitations of each individual piece of equipment. This leaflet shows examples of improper utilizations of this product. Note that it is impossible to show or imagine all improper utilizations and that this product should be used only in the way specified by the manufacturer in this leaflet. If possible this product should be treated as personal.

#### MAINTENANCE

**Cleaning:** use a microfibre cloth and transparent ethyl alcohol. **Temperature:** Always keep this product below 80°C so as not to affect the performance of the product. **Chemicals:** withdraw the product from service if it comes into contact with chemical reagents, solvents or fuels which could affect the performance of the product.

#### STORAGE

Store unpacked in a cool, dry, dark place away from heat sources, high humidity, sharp edges, corrosives or other possible causes of damage.

#### RESPONSIBILITY

The company C.A.M.P. SpA, or the distributor, will not accept any responsibility for damage, injury or death resulting from misuse of or from modifications to a C.A.M.P.

branded product. It is the user's responsibility at all times to ensure that he/she understands the correct and safe use of any equipment supplied by or from C.A.M.P. SpA, that he/she uses it only for the purposes for which it is designed and that he/she practices all proper safety procedures. Before using the equipment, take all necessary steps to familiarise yourself with rescue techniques should an emergency occur. You personally assume all the risks and responsibilities for your actions and decisions: if you are not able or not in a position to assume these, do not use this equipment.

#### 3 YEAR WARRANTY

This product is warranted against any faults in materials or manufacture for 3 years from the purchase date. Limitations of warranty include: normal wear and tear, modifications or alterations, incorrect storage, corrosion, damage due to accidents or negligence, use for which this product is not specifically designed.

### SPECIFIC INFORMATION

#### INSTRUCTIONS FOR USE

##### Summary

This product is intended for use to protect and prevent against eye injury risks in industry, in construction work and in rescue.

- *Ares Visor Ansi (Clear and Shaded)* are face shields tested in accordance with ANSI/ISEA Z87.1-2015 standard.
- *Ares Visor Ansi (Clear and Shaded)* are impact rated (+): it meets requirements for high mass impact and high velocity impact.
- *Ares Visor Ansi Clear* is an ultraviolet filter, scale U6.
- *Ares Visor Ansi Shaded* is a visible light filter, scale L2.

This product is not tested according to CE EN requirements and is not intended for sales/uses in the European Union.

##### Use

*Ares Visor Ansi (Clear and Shaded)* should be used exclusively in combination with all the C.A.M.P. Ares series helmets. Mount the face shield on the helmet following the instructions illustrated in **fig.1**. The face shield can be adjusted on the helmet (**fig.2a**) in two positions: at rest (**fig.2b**) and working (**fig.2c**). Any bumps against the face shield may represent a danger when the user wears conventional glasses under the face shield. The materials which can come into contact with the skin of the person wearing the visor may cause allergic reactions in sensitive subjects. Replace the face shield when scratches or other damage prevent optimum vision.

*Ares Visor Ansi (Clear and Shaded)* does not protect against high velocity particle

projection in situations of extreme temperature and should therefore be used in situations of normal room temperature. For situations in extremely low or high temperatures, choose eye protection marked with the letter T (FT, AT or BT).

#### REVISION

Inspection by the user is required before, during and after each use. Check the legibility of the product's markings. In case of one of the following defects are present, the product should be withdrawn from service immediately:

- damages to the face shield that can compromise the vision;
  - breakage or damages to the fastening system to the helmet;
  - cracks or deformation to the face shield.
- Any product or component showing any defect or wear, or if in doubt, should be withdrawn from service immediately. Do not continue to use a damaged product.

#### LIFETIME

The lifetime of the product is 10 years from the date the product is first used and (taking storage into consideration) in any case cannot exceed the end of the twelfth year from manufacturing (i.e. manufacture year 2021, lifetime until end of 2033, or 10 year from the date of first use, whichever comes first). The following factors can reduce the lifetime of the product: intense use, damage to components of the product, contact with chemical substances, high temperatures, tears and abrasions, violent impacts, failure to maintain as recommended. If a product is suspected to be no longer safe and reliable, replace the product or contact C.A.M.P. or the distributor before continuing use.

#### TRANSPORTATION

Protect the product from risks such as those detailed above.



## ARES VISOR ANSI



### ANSI/ISEA Z87.1-2015

CO 01 MANUAL30  
July 2021 - Rev. 1  
© C.A.M.P. SpA



INSTRUCTION MANUAL  
MANUALE ISTRUZIONI  
NOTICE D'INFORMATION

Third party that carried out the  
ANSI/ISEA Z87.1-2015  
qualification testing:

**CERTOTTICA s.c.a.r.l.**  
Zona Industriale Villanova  
32013, Longarone (BL) - Italy



C.A.M.P. SpA  
Costruzione Anticoli Montagna Premana  
Via Roma, 23 - 23834 Premana (LC) - Italy  
Tel. +39 0341.890117 - Fax +39 0341.818010

[www.camp.it](http://www.camp.it) - [contact@camp.it](mailto:contact@camp.it)

Ref.2642  
Ares Visor ANSI - Clear






1 CAMO 3 387 4 U6  
2 Ref.2642 7 0721  
Made in Italy

Ref.264201  
Ares Visor ANSI - Shaded

1 CAMO 3 287 4 L2  
2 Ref.264201 7 0721  
Made in Italy

**MARKING**

- 1 Name of the manufacturer
- 2 Reference number of the product
- 3 Suitable ANSI/ISEA norm
- 4 Impact rated
- 5 Ultraviolet Filter Scale
- 6 Visible Light Filter Scale
- 7 Month and Year of manufacture

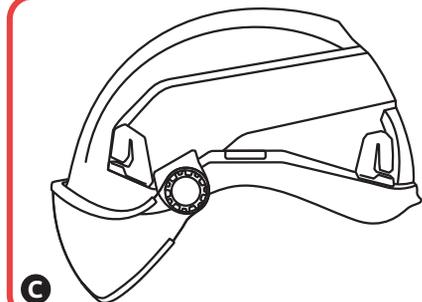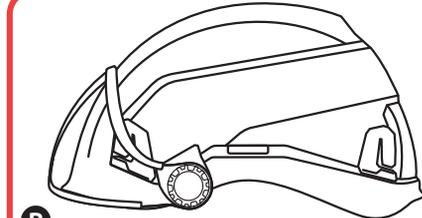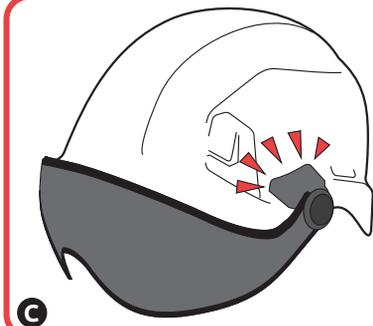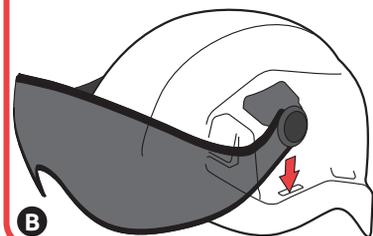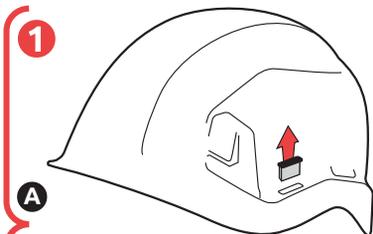

A	MODEL	REF.	ANSI/ISEA Z87.1-2015	IMPACT RATED	ULTRAVIOLET FILTER SCALE	VISIBLE LIGHT FILTER SCALE
	ARES VISOR ANSI - CLEAR	2642	●	+	U6	
	ARES VISOR ANSI - SHADED	264201	●	+		L2